

## **BLANCO INMOTION Banquet Trolleys, Cooled BW-UK 10/15**

---

### **Operating Instructions**

## General information

**Warranty** This unit was manufactured with care using high-quality materials and modern production techniques.

The period of warranty from the date of purchase for this unit is 24 months and for wearing parts and electrical parts six months. The warranty encompasses all the malfunctions and faults arising through the material and manufacturing. Malfunctions and faults caused by improper handling and external influences are excluded. Justified complaints are eliminated free of charge within the warranty period.

Your right to warranty is proven by the purchase receipt bearing the date of purchase. Our terms of business and delivery also apply.

**Copyright** These instructions are protected by copyright. None of this information may be reproduced, distributed, used to the advantage of our competitors or made accessible to third parties either completely or in part.

**Technical modifications** Subject to modifications for the purpose of technical improvement.

**Product documentation** Operating instructions; Target group: operating personnel, kitchen directors.

**Typographical conventions**

-  Important **notes** on particularities or special cases.
- i** **Explanatory information** in chapters or sections containing instructions.
-  **Cross reference** to a chapter, section or external document.
- ✓ **Requirement** which must be fulfilled before the subsequent steps can be carried out.
- **Action** or activity which must be carried out.

---

---

### Model XYZ

A section identified in this way applies only to a particular **unit model** or unit option.

---

---

---

### Warnings

#### **Signal word!**

#### **Type and source of danger**

Possible consequences of noncompliance with the warnings.

- Measures to avoid dangers and the consequences thereof.
- 

The signal word (caution, warning, danger) informs of the level of danger.

**Caution** warns of possible light bodily injuries and damage to property.

**Warning** warns of possible serious bodily injuries.

**Danger** warns of possible highly severe/fatal bodily injuries.

---

## Contents

|                             |   |    |
|-----------------------------|---|----|
| <b>About this product</b>   | Application . . . . .   | 1  |
|                             | Conditions of use . . . . .   | 1  |
|                             | Product features . . . . .  | 1  |
|                             | Standard model . . . . .  | 2  |
|                             | Options and accessories . . . . .   | 2  |
| <b>Functional principle</b> | Description . . . . .   | 2  |
| <b>Safety</b>               | General information . . . . .   | 3  |
|                             | About this product . . . . .  | 3  |
|                             | Transportation . . . . .  | 3  |
|                             | Startup . . . . .   | 4  |
|                             | Operation . . . . .   | 4  |
|                             | Cleaning and care . . . . .   | 6  |
|                             | Maintenance . . . . .   | 6  |
|                             | Repairs . . . . .   | 7  |
|                             | Standards and guidelines . . . . .  | 7  |
| <b>Transportation</b>       | Checking for/reporting on damage incurred during transportation . . . . . | 8  |
|                             | Scope of delivery . . . . .   | 8  |
|                             | Unpacking . . . . .   | 8  |
|                             | Disposing of packaging material . . . . .                                 | 8  |
| <b>Startup</b>              | Prerequisites for operation . . . . .                                     | 9  |
|                             | Connecting the unit . . . . .   | 9  |
| <b>Operation</b>            | Unit overview . . . . .   | 11 |
|                             | Overview of temperature regulator . . . . .                               | 12 |
|                             | Switching cooling on and off . . . . .                                    | 13 |
|                             | Setting the setpoint temperature . . . . .                                | 14 |
|                             | Defrosting the unit manually . . . . .                                    | 15 |
|                             | Locking and unlocking the keyboard . . . . .                              | 16 |
|                             | Pre-cooling the unit . . . . .  | 16 |
|                             | Opening a unit door . . . . .   | 17 |
|                             | Locking back the unit door . . . . .                                      | 18 |
|                             | Closing the unit door . . . . .   | 18 |
|                             | Loading the unit . . . . .  | 19 |
|                             | Moving unit to a new location . . . . .                                   | 20 |
|                             | Traversing ramps, recesses, and slanted surfaces . . . . .                | 22 |
|                             | Keeping food cool . . . . .   | 22 |
|                             | Checking temperature deviations . . . . .                                 | 23 |
|                             | Resetting a saved alarm . . . . .   | 24 |
|                             | Removing food . . . . .   | 24 |
| <b>Shutting down</b>        | Shutting the unit down . . . . .  | 25 |

|                                      |  |    |
|--------------------------------------|--|----|
| <b>Help in the event of problems</b> | Operation indicator LED on<br>on-/off switch does not illuminate . . . . .                                 | 26 |
|                                      | Operation indicator LED on<br>on-/off switch illuminates, but unit is not cooling (sufficiently) . . . . . | 26 |
|                                      | "dA" flashes in the display of the temperature regulator . . . . .   | 27 |
|                                      | Alarm indication of temperature regulator (display: "HAL") –<br>temperature overshoot . . . . .            | 28 |
|                                      | Alarm indication of temperature regulator (display: "LAL") –<br>temperature undershoot . . . . .           | 28 |
|                                      | "PoF" appears in the display of the temperature regulator when a<br>button is pressed . . . . .            | 29 |
|                                      | Corrosion of stainless-steel parts . . . . .   | 29 |
|                                      | The unit has external damage . . . . .   | 29 |
| <b>Cleaning and care</b>             | Stainless steel . . . . .  | 30 |
|                                      | Cleaning frequency . . . . .   | 30 |
|                                      | Cleaning methods . . . . .   | 30 |
|                                      | Cleaning agents . . . . .  | 30 |
|                                      | Emptying the condensation-water catch tray daily and cleaning it<br>every two weeks . . . . .              | 31 |
|                                      | Cleaning the unit . . . . .  | 31 |
|                                      | Removing areas of corrosion on stainless steel . . . . .   | 32 |
| <b>Maintenance</b>                   | Having the unit regularly maintained . . . . .   | 33 |
|                                      | Maintaining the refrigeration unit . . . . .   | 33 |
|                                      | Checking the door seal . . . . .   | 34 |
|                                      | Checking locking brakes . . . . .  | 34 |
|                                      | Checking door magnet for proper seating . . . . .  | 34 |
|                                      | Commissioning a periodical electrical safety inspection . . . . .  | 34 |
|                                      | Checking the connection cable and power plug . . . . .   | 34 |
|                                      | Changing the refrigeration parameters . . . . .  | 35 |
| <b>Repairs</b>                       | Authorized persons . . . . .   | 36 |
|                                      | Description of problem . . . . .   | 36 |
|                                      | Replacing components . . . . .   | 36 |
|                                      | Spare parts . . . . .  | 36 |
|                                      | Address . . . . .  | 37 |
| <b>Disposal</b>                      | Disposing of the unit . . . . .  | 37 |
| <b>Technical data</b>                | General data . . . . .   | 38 |
|                                      | Electrical data . . . . .  | 38 |
|                                      | Environment . . . . .  | 39 |
|                                      | Refrigeration system . . . . .   | 39 |
| <b>Ordering information</b>          | BW-UK 10 . . . . .   | 40 |
|                                      | BW-UK 15 . . . . .   | 40 |
|                                      | Operating instructions . . . . .   | 40 |
| <b>Accessories</b>                   | Gastronorm grates, GR 2/1 . . . . .  | 40 |
|                                      | Gastronorm containers . . . . .  | 40 |
|                                      | Cloches . . . . .  | 40 |
|                                      | Plate carriers . . . . .   | 40 |
|                                      | BLANCO microfiber cleaning cloth . . . . .   | 40 |
|                                      | Stainless steel cleaning and care agent BLANCOPOLISH . . . . .   | 40 |
|                                      | Service CD . . . . .   | 40 |

---

## About this product

**Application** Fully prepared, pre-portioned food on plates or food in Gastronorm containers is kept cool in the cooled banquet trolley.

The cooled banquet trolley is not suitable for cooling down warm dishes and food. It may not be used as a room cooler.

The cooled banquet trolley is particularly suitable for use in social facilities (clinics, retirement homes, day care centers), hotels, the food service industry (banquets, party services) and in cafeterias (canteens, dining halls), e.g., for advanced evening portioning.

### Conditions of use Environment

The cooled banquet trolley may be used when the surrounding temperature is between +15 °C and +32 °C and at normal humidity (without moisture condensation).

### Instruction of third parties

If the cooled banquet trolley is lent to third parties, these persons must be instructed in the safe handling of the unit, and possible dangers must be pointed out.

### Product features General

The cooled banquet trolley is made of stainless steel as standard.

The unit body is double-walled and insulated. The front of the unit is closed by a double-walled unit door.

As standard, the transportation mechanism of the banquet trolley consists of two steering castors with locking brakes and two fixed castors.

The cooled banquet trolley is equipped with active convection cooling.

The following banquet trolley models are available:

- Banquet trolley BW-UK 10: 10 ledge pairs
- Banquet trolley BW-UK 15: 15 ledge pairs

### Operation

Vertical push handles allow easy movement of the banquet trolley. Stable corner guards protect the unit from damage. Circumferential impact protection strips are available as an option.

The unit door has been provided with a self-closing door lock. The door can be opened 270° and locked to the exterior side.

The interior side walls feature support ledges. Two indentations are found above each set of support ledges. They prevent accidental tipping when removing the Gastronorm grates or Gastronorm containers.

Cooling is started and ended with the On/Off switch on the front of the unit.

The refrigeration parameters for cooling can be set by the degree via a temperature regulator with a digital temperature display. LEDs in the display of the temperature regulator show the current operating status of the unit.

The temperature regulator registers deviations of the actual temperature from the setpoint temperature outside a preset temperature range and signals them via a visual signal.

The temperature range of the temperature regulator lies between –10 °C and +8 °C.

- Standard model** The standard model of the cooled banquet trolley features:
- Double-walled unit body made of stainless steel
  - Double-walled hinged door
  - Either 10 or 15 ledge pairs, depending on the unit model
  - Ledge spacing of 115 mm (BW-UK 10) or 75 mm (BW-UK 15)
  - Two push handles on each side wall of the unit
  - Four corner guards
  - Two steering castors with locking brakes, two fixed castors
  - Castor arrangement "A": castors at the unit corners

- Options and accessories** The cooled banquet trolley is available with the following optional equipment:
- All-round railing
  - Circumferential impact protection strip
  - Castor model available in different materials
  - Gastronorm grates
  - Stainless-steel plate carriers

---

## Functional principle

- Description** The cooled banquet trolley is equipped with active convection cooling. Convection cooling operates based on the following principle:  
The evaporator of the refrigeration system extracts heat from the air inside the unit. An evaporator fan causes the cooled air to circulate in the unit. This functional principle results in:
- Quick cooling of the unit interior
  - Lower refrigeration temperature ( $-10\text{ °C}$ ) than active contact cooling possible
  - Even distribution of temperature

The unit interior has a drainage facility for condensation water which collects in the condensation-water catch tray on the exterior.

---

# Safety

**General information** The unit has been built using state-of-the-art technology. Accordingly, all the requirements necessary for safe operation have been fulfilled. Additional dangers do nevertheless exist when the unit is operating. The safety precautions and warnings in these operating instructions are there to help you protect yourself against these sources of danger.

## Safety precautions

Thoroughly read and observe the safety precautions in this chapter.

The operator is responsible for the observance of the safety precautions in these operating instructions.

## Warnings

Observe the warnings with the danger symbol (warning triangle) in the text.

## Operating instructions

These operating instructions must be read carefully before you use the unit for the first time.

The operator is responsible for ensuring that all users have read these instructions before using the unit.

Keep these operating instructions in a location which is always accessible to operating personnel.

## About this product **Application**

The unit may only be used for the applications specified.

The operator is responsible for the appropriate and proper use of the unit.

## Conditions of use

The unit is only to be operated under the appropriate environmental conditions.

The users of the unit must be instructed in its operation and must have read and understood these operating instructions.

## Transportation **Upright transport position**

Transport the unit in an upright position only.

If the unit was not transported upright, wait 2 hours before starting it up.

## Transportation with a truck or delivery vehicle

The unit may only be transported in a truck or delivery vehicle with a loading ramp. The loading ramp may not exceed an angle of inclination of 10°.

Secure against shifting of the unit.

Secure the unit against vertical movement during transportation. Just locking the brakes is insufficient transportation security.

Use padded safety bars.

### **Startup Location**

Never operate the unit next to equipment which develops large amounts of steam (e.g., dishwasher). The steam can cause moisture condensation on the unit.

When the unit is connected to the power the moisture film may cause a short-circuit or an electric shock.

Keep the ventilation slits of refrigeration unit clear. The ventilation slits must be at least 10 cm from a wall with the refrigeration unit switched on. Blocked ventilation slits can lead to overheating and failure of the refrigeration unit.

### **Startup after a storage period**

When the unit is brought from a cold storage room into a kitchen, moisture from the air in the room will form on the surfaces and the inside the unit.

If the unit is connected to the power the moisture film may cause a short-circuit or an electric shock.

Do not operate the unit until it has reached room temperature.

### **Mains connection**

The mains voltage and frequency listed on the rating plate must match the corresponding values of the electrical outlet.

The unit may not be used if the insulation on the power cable or the power plug is damaged.

Always unplug the plug at the power plug housing.

### **Operation General information**

The user must know the dangers involved in the unit and be able to assess them.

The unit is only to be used when it is in proper working order.

If damage is present, secure the unit against accidental use and have repairs carried out immediately at one of the following locations:

- In-house, by BLANCO-trained technician
- Externally, by BLANCO-trained customer service engineer
- BLANCO Service
- For repairs to the refrigeration system: Specialist refrigeration engineers

Always secure the unit from rolling away by setting the locking brakes. The unit can cause injuries and damage to property if allowed to roll away accidentally.

Avoid unnecessary opening of the unit door during refrigeration. Only open the unit briefly to load or remove food.

Always keep clothes over food on plates. Always keep lids on Gastronorm containers containing food.

**Loading**

To prevent shifting of the center of gravity to the unit top, the unit should generally be loaded from the bottom up.

When loading with Gastronorm containers, load the support ledges fully, e.g., with two Gastronorm containers of type GN 1/1 on each support ledge, so that the containers cannot slide when changing locations.

**Loadability of unit top**

Do not place items with an area load exceeding 25 kg on top of the unit.

**Hygiene regulations**

Observe the corresponding regulations on foodstuffs and the properties of the food when refrigerating food.

**Danger of children being trapped inside**

Secure empty banquet trolleys from being accessed by children. Children who climb into empty banquet trolleys and close the unit door cannot get out unassisted. Place the empty banquet trolleys with the unit door side toward the wall or place them in an area inaccessible to children.

**Change of location**

Remove any objects from the unit top before changing its location. Objects can slide off the unit top when pushing the unit.

Hold unit door closed while changing its location. Otherwise, grates or Gastronorm containers can fall out of the unit when it is pushed.

If the unit is on a sloped surface, it must be secured against rolling away with further measures (e.g., wedge) in addition to locking the locking brakes.

With the door closed, the unit can be tilted to an angle of 10° while standing still. Only sloping surfaces with an incline < 10° may be crossed.

To prevent the risk of damage to the underside of the unit (cooling) and the castors:

- Do not move the unit when the locking brakes are locked
- Avoid impacts
- Do not traverse bumps or steps
- Do not traverse uneven floors

The unit is to be pushed only, never pulled.

When moving the unit, ensure that no persons or objects which are located in the way of the unit are overlooked. If the person pushing the banquet trolley cannot see over it, a second person must walk in front of the unit when it is being moved to allow it to be moved forward safely.

Always push the unit with both hands on the handles on the side of the unit with the steering castors and the locking brakes. Depending on the weight of the unit, if you push it with just one hand it is possible you would not be able to apply the brakes quickly enough.

Be careful to ensure that your hands are not pinched (danger of crushing) between the push handles and walls or other objects (e.g., cabinets).

Two people (one at each side wall of the unit) are required to move the unit over ramps or swales.

**Cleaning and care**    **Power plug**

Unplug the power plug before cleaning the unit. Water seeping into the unit can cause a short-circuit. If this happens, there is a risk of electric shock.

**Hygiene**

The provisions of the hygiene guidelines 93/43/EEC as well as your national hygiene regulations must be complied with.

The unit fulfills the requirements of the hygienic design HS.

**Cleaning frequency**

Clean the unit thoroughly after each use.

The unit is equipped with an automatic defroster and a condensation-water catch tray. The condensation-water catch tray is to be emptied manually after each use.

**Cleaning methods**

Use only approved cleaning methods.

Do not use a steam jet device or high-pressure cleaner.

**Cleaning water**

Thoroughly dry the unit after cleaning. Remove cleaning water from the floor of the unit interior.

A danger of slipping exists if cleaning water runs out of the unit during or after cleaning.

Completely wipe up any water which runs out of the unit.

**Maintenance**    **Locking brakes**

Regularly check the effectiveness of the locking brakes.

If the effectiveness of the brakes is not sufficient, have the defective castor replaced immediately by one of the following:

- In-house, by BLANCO-trained technician
- Externally, by BLANCO-trained customer service engineer
- BLANCO Service

**Unit door**

Check the door seal for damage and aging after each cleaning (visual check).

**Electrical safety: Re-inspection**

At least once every six months, have a periodical electrical safety inspection carried out by a professional electrician in accordance with the DIN VDE 0702 series of standards.

**Connection cable and power plug**

At least once every six months check the cable and power plug for mechanical damage and signs of excessive aging in accordance with BGV A 3 or the corresponding national regulations.

**Repairs Authorized persons**

The unit may only be repaired by the following points:

- In-house, by BLANCO-trained technician
- Externally, by BLANCO-trained customer service engineer
- BLANCO Service
- For repairs to the refrigeration system: Specialist refrigeration engineers

The warranty will be invalidated if the unit is repaired by anyone else.

**Standards and guidelines**

Observe the applicable standards, guidelines and safety regulations.


The operator is responsible for compliance with the applicable standards, guidelines and safety regulations.

## Transportation

### Checking for/reporting on damage incurred during transportation

- ☞ It is imperative that the unit be checked immediately after delivery for damage incurred during transportation (visual inspection).
- Record on the waybill (description of defect) any damage incurred during transportation, doing so in the presence of the carrier.
- Have the carrier confirm the damage (signature).
- Retain the unit and notify BLANCO of the damage, enclosing the waybill.
- or –
- Do not accept the unit and return it to BLANCO via the carrier.
- ☞ This procedure will ensure correct processing of claims. If transportation damage is reported later the consignee must provide evidence of this.

### Scope of delivery

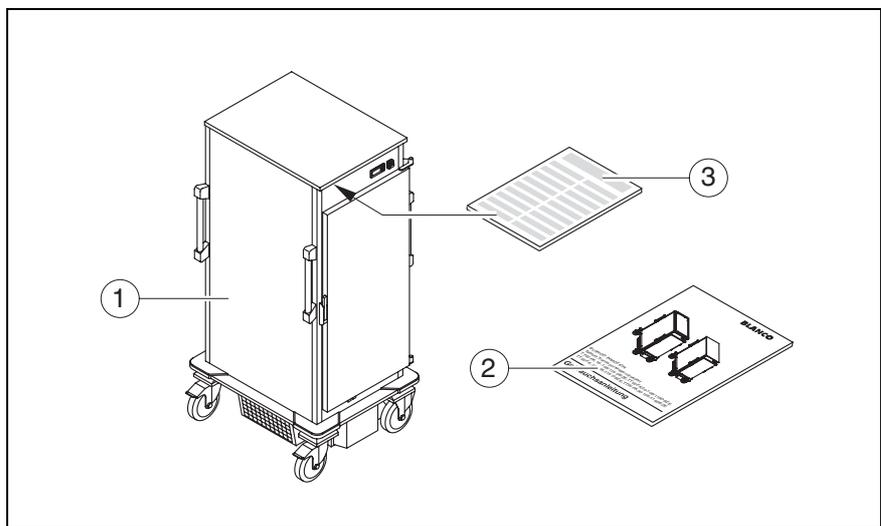

- (1) BLANCO INMOTION Banquet Trolley, Cooled
- (2) Operating instructions
- (3) Instructions on temperature control with parameter list for service (in ceiling area under the top cover)

The scope of delivery and the model of the cooled banquet trolley are to be taken from the delivery documentation.

### Unpacking

- Open the transportation packaging at the places provided. Do not rip or cut it!
- Check the scope of delivery.

### Disposing of packaging material

- ☞ Packaging materials can be handed over to a recycling center after quoting the disposal contract number. If you cannot find the disposal contract number, it can be obtained by contacting BLANCO Service.
- Dispose of packaging material correctly and in an environmentally responsible manner.

## Startup

### Prerequisites for operation

- ✓ The unit has reached room temperature and is dry
- ✓ The unit is clean
- ✓ The unit and power plug have no known defects or visible damage
- ✓ The locking brakes are locked
- ✓ The unit is switched off

### Connecting the unit

- ☞ If transported upright as specified, the unit can be started up immediately. If the unit was transported in another position, e.g., at an extreme angle, wait 2 hours before connecting the unit to the power supply.

### Positioning the unit

- To ensure the best possible cooling of the food, note the following points when selecting where to place the unit:
  - Operate the unit far away from possible heat sources (such as radiators, ovens, sunlight)
  - Operate the unit far away from equipment which develops large amounts of steam (e.g., dishwasher).
- Ensure that the ventilation slits of the refrigeration unit are not covered by anything (unimpeded exit of air). The ventilation slits must be at least 10 cm from a wall with the refrigeration unit switched on.
- Make sure that the condensation-water catch tray is pushed into the opening on the unit exterior.
- Move the unit into its designated location and lock the brakes.
  - ☞ Section "Moving unit to a new location" on page 20.
- Before switching on, make sure the unit interior is in an absolutely hygienic state.

### Plugging the unit into an electrical outlet



#### **Caution!**

#### **Damage to property due to improper mains connection!**

If the unit is not rated for the mains voltage or frequency which is available, the unit's electronics may suffer permanent damage.


- Before connecting, ensure that the mains voltage and frequency listed on the rating plate match the corresponding values of the electrical outlet.
- 
- Plug the power plug into the electrical outlet.

- ▶ Switch on unit with the On/Off switch.  
The operation indicator LED illuminates.

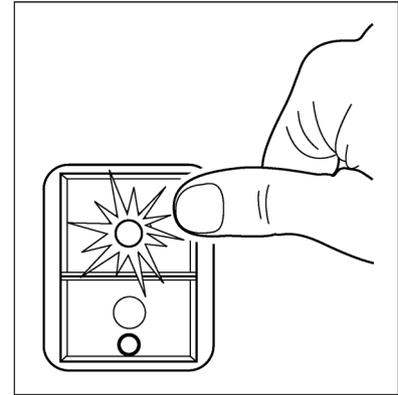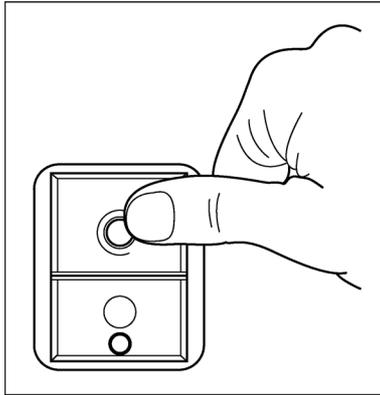


## Operation

### Unit overview

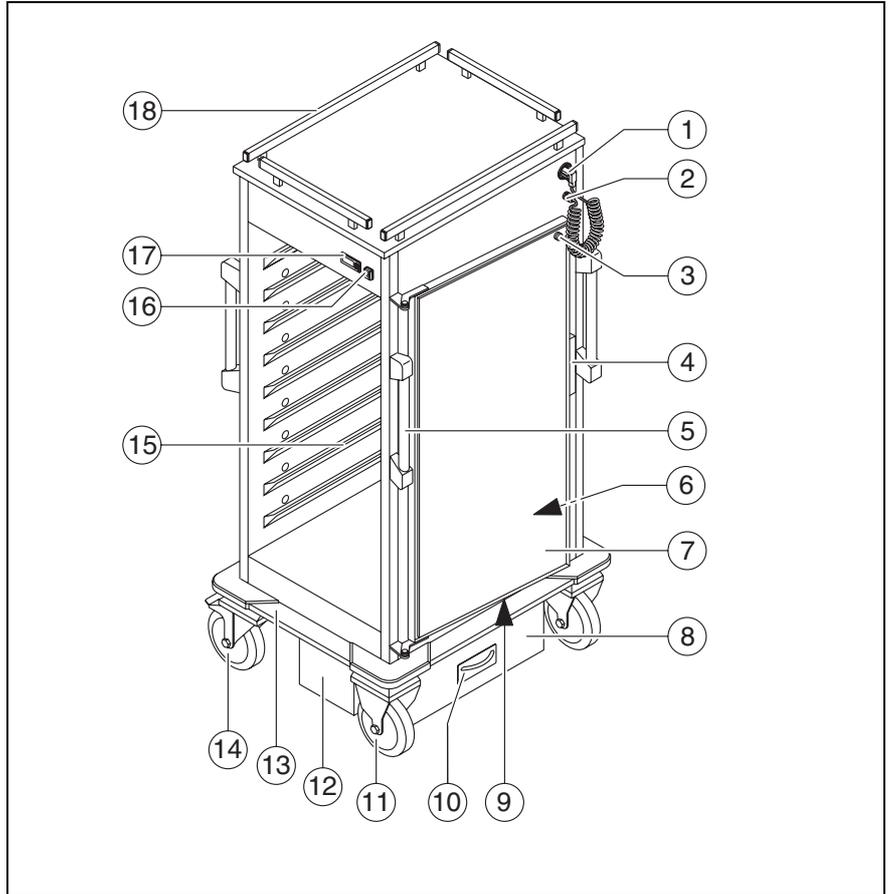

- (1) Power plug and power plug retainer
- (2) Power cable
- (3) Magnet for door contact
- (4) Door lock
- (5) Push handle
- (6) Revision panel for the capacitor
- (7) Unit door: locked at side wall
- (8) Refrigeration unit in machine compartment
- (9) Door catch (for locking the unit door to the unit side wall)
- (10) Condensation-water catch tray
- (11) Fixed castor
- (12) Revision panel for the refrigeration unit
- (13) Impact protection strips (optional)
- (14) Steering castor with locking brake
- (15) Support ledge
- (16) On/Off switch
- (17) Temperature regulator
- (18) Railing (optional)

### Overview of temperature regulator

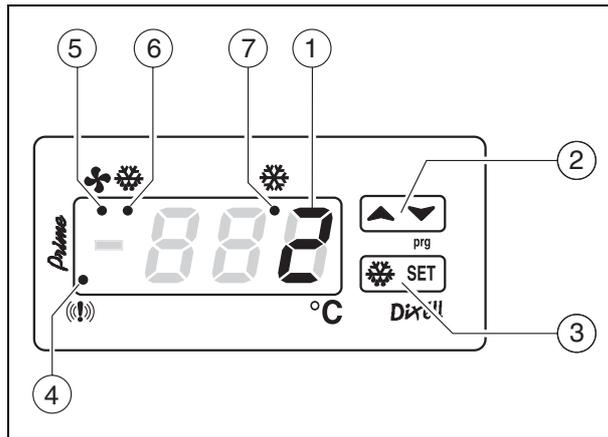

- (1) Temperature display:  
shows the actual temperature in the unit, setpoint temperature, minimum/maximum temperatures for temperature undershoot/overshoot, duration of a temperature undershoot/overshoot, information messages.
- (2) Button rocker "Up/Down arrow":  
increases/decreases parameter values.
- (3) Button rocker "Manual defrost/SET":  
starts manual defrosting/starts programming mode.
- (4) "Alarm" signal LED:  
illuminates when unit drops below or exceeds the setpoint for over 30 minutes.
- (5) "Evaporator fan" operation indicator LED:  
illuminates when the evaporator fan is in operation.
- (6) "Defrosting" operation indicator LED:  
illuminates while defrosting.
- (7) "Refrigeration unit" operation indicator LED:  
illuminates when the refrigeration unit is in operation.

☞ The "Alarm" signal LED illuminates during an alarm or after an alarm until the alarm is reset. The alarm can only be reset if the temperature overshoot/undershoot is no longer in effect. Interrupting the power supply is not an option for resetting the alarm indication. Alarm indications are saved and must be reset manually.

☞ Section "Resetting a saved alarm" on page 24.

☞ A magnet is screwed on inside the door at the top and functions as a door contact. "dA" flashes in the display while a door is open.



☞ Section "'dA' flashes in the display of the temperature regulator" on page 27.

### Switching cooling on and off

- ☞ The temperature regulator is only functional if cooling is activated.
- ☞ The "Refrigeration unit" operation indicator LED illuminates while the refrigeration unit is running. As soon as the set setpoint temperature is reached, the refrigeration unit switches off until the actual temperature has risen by a preset amount. The "Refrigeration unit" operation indicator LED goes out during this time. The evaporator fan is still in operation.
- ☞ The evaporator fan circulates the air inside the unit and in the coolant evaporator. The evaporator fan runs as soon as cooling is switched on. Operation of the evaporator fan is interrupted if the door is opened or defrosting is active.  
The fan noise which can be heard even while the evaporator fan is switched off is from the capacitor fan, which runs continuously to cool the capacitor.

### Activating cooling



- ✓ Unit connected to power supply
- Start cooling with the On/Off switch.  
The operation indicator LED of the On/Off switch illuminates.

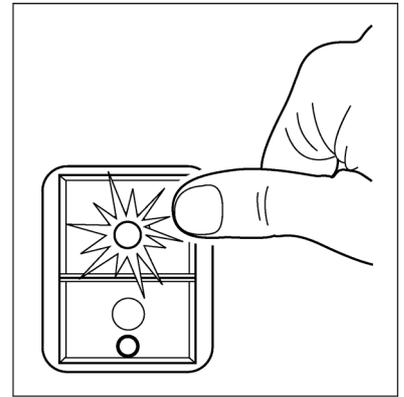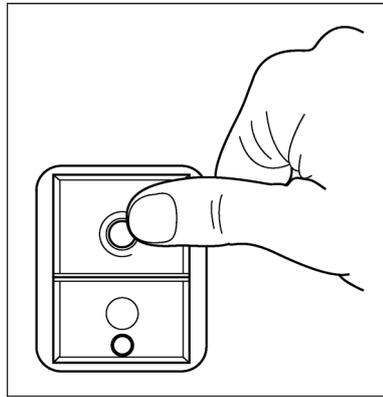

"---" appears briefly in the display of the temperature regulator  
The current temperature inside the unit is then displayed.  
The temperature on the interior of the unit is lowered depending on the set setpoint temperature.

### Deactivating cooling

- End cooling with the On/Off switch.  
The operation indicator LED of the On/Off switch goes out.

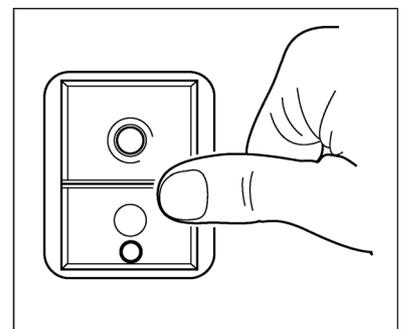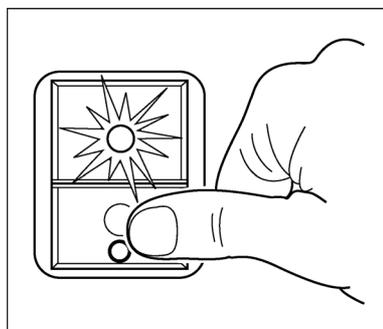

### Setting the setpoint temperature

☞ When cooling is active, the standard display shows the actual temperature inside the unit.

☞ The setpoint temperature is set to +2 °C at the factory. If too low a temperature is set this will result in the refrigeration unit running permanently (as will also happen when the ambient temperature is too high). Possible consequences:

- Ice will build up more quickly on the evaporator
- Defrosting necessary often
- Longer defrosting duration required
- More energy will be consumed

### Displaying the setpoint temperature

- ✓ Unit connected to power supply
- ✓ Cooling activated (The operation indicator LED of the On/Off switch illuminates)
- ✓ The display shows the actual temperature

**SET**

- ▀ Press the "SET" button briefly.  
Setpoint temperature is displayed. The actual temperature appears in the display after approx. 5 sec. or if the "SET" button is pressed again.

### Changing the setpoint temperature

- ✓ Unit connected to power supply
- ✓ Cooling activated (The operation indicator LED of the On/Off switch illuminates)

**SET**

- ▀ Press and hold the "SET" button for approx 2 seconds.  
The setpoint temperature is displayed and the "Refrigeration unit" operation indicator LED flashes.



- ▀ Use the "Up arrow" button to raise the setpoint temperature.  
– or –



- ▀ Use the "Down arrow" button to lower the setpoint temperature.

☞ If the "Up arrow" or "Down arrow" button is pressed and held, the temperature setting changes continuously. The rate of change increases when the "Up arrow" or "Down arrow" button is held down longer.

**SET**

- ▀ To save the changed setpoint temperature press the "SET" button briefly.  
– or –  
Wait approx. 10 seconds.  
The setpoint temperature is set. The "Refrigeration unit" operation indicator LED stops flashing and illuminates when the unit is cooling.  
The actual temperature inside the unit is displayed.

**Defrosting the unit manually**

- ☞ The unit performs automatic defrosting for max. 15 minutes every 6 hours, which is always followed by a drip-off period lasting 8 minutes. Additional manual defrosting is only necessary if the actual temperature increasingly deviates upward from the set setpoint temperature.
- ☞ Usually it will suffice to allow the unit to defrost by starting manual defrosting. It may occasionally be necessary to switch off the unit for defrosting for at least 24 hours. Both cases are described in more detail below.
- To start defrosting manually, press the "Defrost" button for approx. 2 seconds. Refrigeration is stopped and defrosting starts. The "Defrosting" operation indicator LED illuminates.
- i During defrosting, the evaporator fan is switched off and the refrigeration unit continues running, but does not refrigerate. Heat emitted by the unit helps defrosting.
- i To interrupt manual defrosting, it must be ended via the On/Off switch for cooling.
- i After the preset time for manual defrosting time has passed (max. 15 minutes + 8 minutes drip-off time), the unit automatically switches back to cooling mode. Defrosting has now been completed. The evaporator fan switches on as soon as the sensor in the evaporator registers a temperature of approx. +2 °C.
- ☞ If defrosting does not cure the problem (symptom described above is still present), you will need to shut down cooling for an extended period. The procedure to follow in this case is described below:
  - End cooling with the On/Off switch. Cooling is ended.
  - Leave cooling switched off for at least **24 hours**.
  - Empty the condensation-water catch tray. To avoid overflowing, slide a flat (GN) container with a large capacity under the unit to act as the condensation-water catch tray in case of heavy icing.
  - Clean the unit.
    - ↳ Section "Cleaning the unit" on page 31.

### Locking and unlocking the keyboard



### Pre-cooling the unit

#### Locking the keyboard

- ☞ The keyboard lock protects against unauthorized access to temperature adjustment, e.g., changing of the setpoint temperature.
- ☞ Only the following functions can be executed when the keyboard is locked:
  - Displaying the setpoint temperature
  - Resetting the alarm indication
  - Displaying the minimum/maximum temperature in case of alarm
- Press and hold both buttons of the button rocker "Up/Down arrow" for approx. 3 sec.  
The "PoF" display appears briefly. The actual temperature is then displayed again.

#### Unlocking the keyboard

- Press and hold both buttons of the button rocker "Up/Down arrow" for approx. 3 sec.  
The keyboard is unlocked. The actual temperature is displayed.

- i To prevent warming up of the pre-cooled food after loading, the unit must be pre-cooled for 30–60 minutes, depending on the ambient temperature and the desired refrigeration temperature.
- ☞ The "Refrigeration unit" operation indicator LED illuminates while the refrigeration unit is running. As soon as the set setpoint temperature is reached, the refrigeration unit switches off until the actual temperature has risen by a preset amount. The "Refrigeration unit" operation indicator LED goes out during this time. The evaporator fan is still in operation.
- ✓ Unit connected to electrical mains
- ✓ Cooling activated (The operation indicator LED of the On/Off switch illuminates)
- Start cooling with the On/Off switch approx. 30 – 60 minutes before loading.
  - ☞ Section "Switching cooling on and off" on page 13.
- Change the setpoint temperature if necessary.
  - ☞ Section "Setting the setpoint temperature" on page 14.


**Opening a unit door**

- ☞ To keep the loss of cool air to a minimum, do not open the door unnecessarily while cooling is active.
- ☞ The temperature regulator is only functional if cooling is activated.
- ☞ If the door is opened during cooling, cooling and ventilation are switched off automatically and remain off as long as the door stays open. "dA" flashes in the display while a door is open. Ventilation switches on again as soon as the door is closed. Cooling remains off for at least 3 minutes and only switches on again once the door has been closed if the door was open longer than 3 minutes and the setpoint temperature is not reached.

**⚠ Caution!****Hand can be pinched!**

Your hands can be pinched to the side wall and injured when locking the unit door.


- Do not put your hand between the unit door and the unit or hold it there when locking.
- Carefully open and lock the unit door (without momentum).
- Pull the door handle on the door lock in the direction of the arrow and open the unit door.

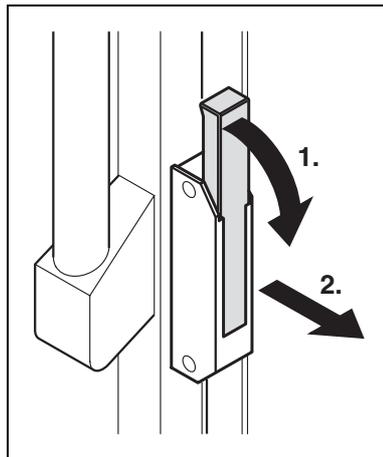

The evaporator fan switches off. "dA" flashes in the display.

The "Refrigeration unit" and "Evaporator fan" operation indicator LEDs go out.

- Locking back the unit door** ➤ Open the unit door completely (270°) and press it to the unit side wall until the ball catch (1) perceptibly locks into the door lock (2).

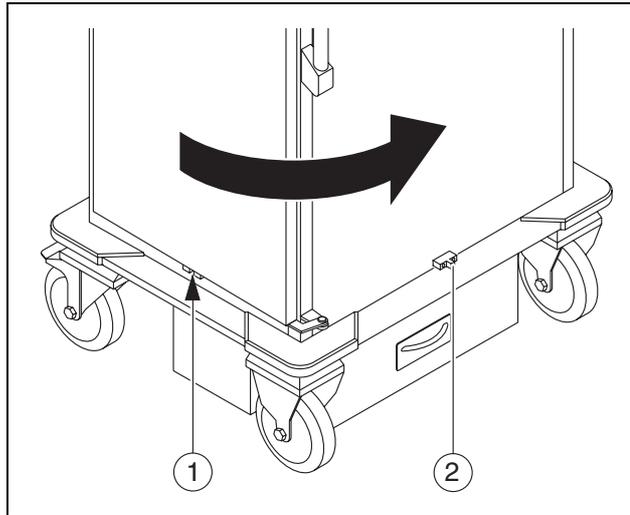

- Closing the unit door** ☞ The temperature regulator is only functional if cooling is activated.

---

**⚠ Caution!**

**Hand can be pinched!**

Your hands can be pinched and injured when the unit door is being closed.

- Do not put your hand between the unit door and the unit or hold it there when closing.
- Carefully close the unit door (without momentum).

---

➤ Pull the unit door out of the door lock.

➤ Close unit door without momentum.

➤ Press the unit door into the lock until it is felt to engage.

The evaporator fan switches on again. The "Evaporator fan" operation indicator LED illuminates.

The refrigeration unit switches on again:

- Immediately if the door was open longer than 3 minutes or
- After 3 minutes, starting from the point when the door was opened, if the temperature inside the unit has risen the preset amount.

The "Refrigeration unit" operation indicator LED illuminates.

The "dA" display goes out.

**Loading the unit**

- ☞ Always insert the food pre-cooled. The unit is only suitable for keeping food cool, not for cooling food down.
  - ✓ Unit pre-cooled 30–100 minutes
  - ✓ Food pre-cooled for refrigeration
  - ✓ Food on plates is covered with cloches
  - ✓ Food in Gastronorm containers is covered with lids
  - ✓ Door seal clean and undamaged
- 



 **Warning!****Danger of tipping when center of gravity is at the top of the unit!**

If Gastronorm containers are only loaded at the top of the device, the center of gravity moves upward, and there is a risk that the unit could tip over. A tipping unit can cause serious injuries.


- Always load the unit from the bottom up.
  - For partial loading, only load the bottom area of the unit.
  - When loading with Gastronorm containers, always load support ledge pair fully, e.g., with two Gastronorm containers of type GN 1/1.
- 
- Open the unit door.
    - ☞ Section "Opening a unit door" on page 17.
  - Insert Gastronorm containers until they contact the rear wall.
  - Close the unit door.

### Moving unit to a new location **Switching the unit off**

- ▶ Switch off the unit with the On/Off switch.  
The operation indicator LED of the On/Off switch goes out.

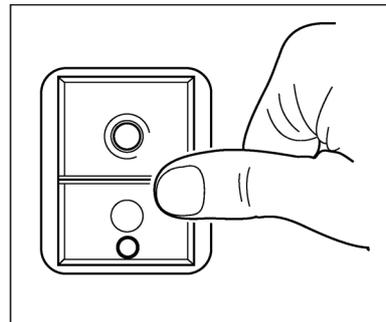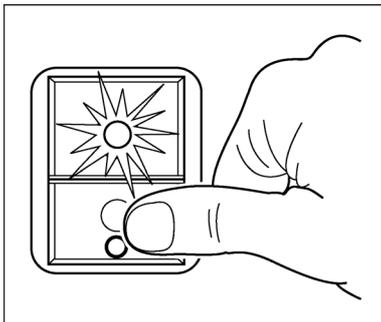

- ▶ Unplug the power plug.
- ▶ Insert the power plug into the power plug retainer on the unit.

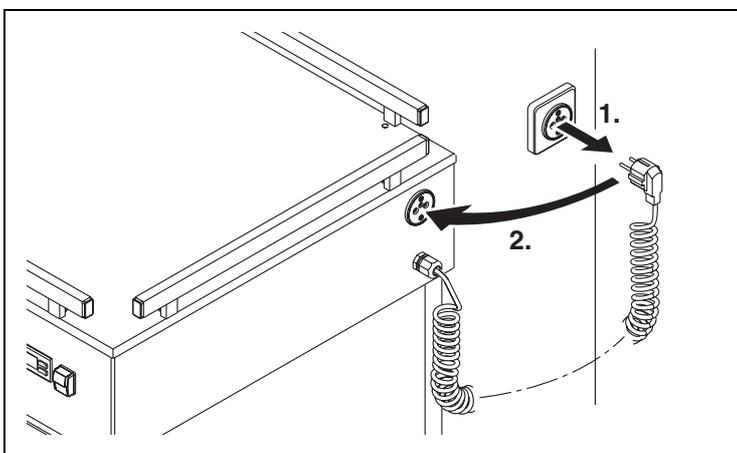

### Change of location

- ☞ If the traversal route is uneven, special measures must be taken.
  - ↳ Chapter "Traversing ramps, recesses, and slanted surfaces" on page 22.
- ✓ Do not place objects on top of the unit
- ✓ Unit door closed
- ✓ Cooling deactivated (The operation indicator LED of the On/Off switch illuminates)
- ✓ Power plug unplugged and inserted into the power plug retainer
- ✓ Two people

---

### **Caution!**

#### **Be careful not to jam your foot!**

Your foot can be pinched and injured when you release or lock the locking brake.

- ▶ Be careful not to place your foot between the locking brake and the corner guard/impact protection strip.
-


---

**⚠ Warning!****Limited field of vision!**


When pushing the unit, a person in front of the unit can be overlooked and injured. The unit or an object in front of the unit can be damaged due to limited field of vision.

- Make sure that another person walks ahead of the unit when pushing.
- Always use two hands when pushing the unit.
- Push the unit so that your hands on the push handles are a sufficient distance from the wall or other objects and cannot be crushed.

- 
- Release the locking brakes.

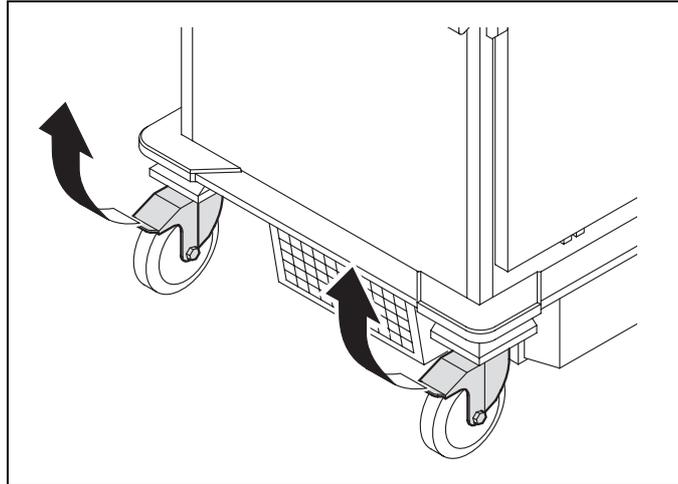

- Using two hands, carefully push the unit to its new location.
- Lock the locking brakes.

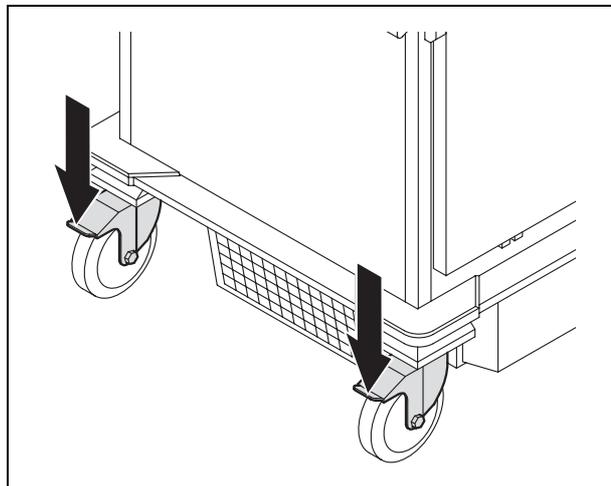

- If necessary:
  - Insert power plug and switch unit on again.
  - Pre-cool for 30–100 minutes before loading.

**Traversing ramps, recesses,  
and slanted surfaces**

- ✓ Do not place objects on top of the unit
- ✓ Unit door closed
- ✓ Cooling deactivated (The operation indicator LED of the On/Off switch illuminates)
- ✓ Power plug unplugged and inserted into the power plug retainer
- ✓ Condensation-water catch tray emptied
- ✓ Two people

---

 **Warning!**

**The unit can tip!**

The unit can tip over when traversing a slanted surface.

- ▶ Never move the unit across a surface (e.g., ramp) with an incline > 10°.
  - ▶ Always load the unit from the bottom up to prevent the center of gravity from changing.
  - ▶ For partial loading, only load the bottom area of the unit.
  - ▶ When loading with Gastronorm containers, always load support ledge pair fully, e.g., with two Gastronorm containers of type GN 1/1.
- 
- ▶ First check whether the unit can be safely pushed over the ramp, recess or slanted surface.
  - ▶ Carefully push the unit with two people (one at each unit side wall).

**Keeping food cool**

- ☞ To keep the loss of cool air to a minimum, do not open the door unnecessarily while cooling is active.
- ✓ Unit pre-cooled for 30–100 minutes, depending on the ambient temperature
- ▶ If the unit was unplugged from the power supply after pre-cooling (e.g., after a change of location), plug in the power plug again and switch on the unit with the On/Off switch.
- ▶ Switch on cooling with the On/Off switch.
- ▶ Change the setpoint temperature if necessary.
  - ☞ Section "Setting the setpoint temperature" on page 14.
- ▶ Keep the food cool as long as desired.

### Checking temperature deviations

- ☞ If the actual temperature deviates from the setpoint by a certain amount ( $-10\text{ °C}$ ,  $+10\text{ °C}$ ), this temperature overshoot/undershoot is registered by the temperature regulator. In case of temperature deviations in effect longer than 30 minutes, the "Alarm" signal LED illuminates. Either "HAL" (temperature overshoot) or "LAL" (temperature undershoot) and the actual temperature flash in an alternating fashion in the display.
- ☞ After cooling is activated, no temperature overshoot or undershoot of the setpoint is detected for 90 minutes to prevent an alarm indication from arising during the pre-cooling phase.

### Displaying temperature deviations

- ☞ The "Alarm" signal LED illuminates in case of a temperature deviation. Either "HAL" (temperature overshoot) or "LAL" (temperature undershoot) and the actual temperature flash in an alternating fashion in the display.
- ☞ If the actual temperature reaches the preset temperature range of the setpoint during an alarm indication, the actual temperature is displayed again. The "Alarm" signal LED continues to illuminate and must be reset manually.
- ☞ This displayed alarm duration takes into account the 30 minutes prior to triggering of the alarm.

- ✓ The "Alarm" signal LED illuminates
- Press the "Up arrow" button briefly.

– or –

Press the "Down arrow" button briefly.

"HAL" appears briefly in the display for a temperature overshoot, and "LAL" for a temperature undershoot.

The display of the highest/lowest temperature during the temperature deviation then appears for approx. 2 seconds, followed by "tiM" and the duration of the temperature deviation (in h:min).

The actual temperature display then appears again.



### Resetting a saved alarm

☞ The alarm can only be reset if the temperature overshoot/undershoot is no longer in effect. Interrupting the power supply is not an option for resetting the alarm indication. Alarm indications are saved and must be reset manually.

✓ The actual temperature is within the preset temperature range (–10 °C, +10 °C) around the setpoint

✓ The "Alarm" signal LED illuminates

▶ Press the "Up arrow" button briefly.

– or –

Press the "Down arrow" button briefly.

"HAL" appears briefly in the display for a temperature overshoot, and "LAL" for a temperature undershoot.

The display of the highest/lowest temperature during the temperature deviation then appears for approx. 2 seconds, followed by "tiM" and the duration of the temperature deviation (in h:min).

**SET**

▶ Press and hold the "SET" button during this indication (HAL or LAL, value of highest/lowest temperature deviation) until "rSt" briefly flashes and the actual temperature reappears.

The "Alarm" signal LED goes out. The alarm is reset. The actual temperature appears in the display.

### Removing food

▶ Open unit door fully and press it to the unit side wall.

☞ Section "Opening a unit door" on page 17.

---

### **Warning!**

#### **Danger of tipping when center of gravity is at the top of the unit!**

If the lower Gastronorm containers are removed first, the center of gravity of the unit shifts upward, and there is a risk that the unit could tip over. A tipping unit can cause serious injuries!



▶ Unload the unit from the top down. Remove Gastronorm containers or plates starting from above.

☞ The unit must be cleaned thoroughly after use.


☞ Chapter "Cleaning and care" on page 30.

## Shutting down

- Shutting the unit down**
- Switch off the unit with the On/Off switch.  
The operation indicator LED of the On/Off switch goes out.

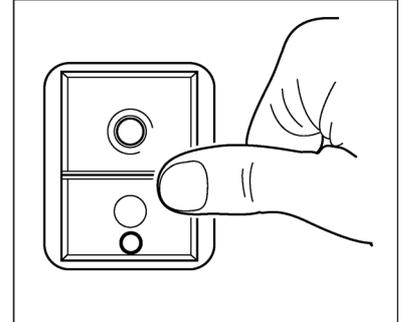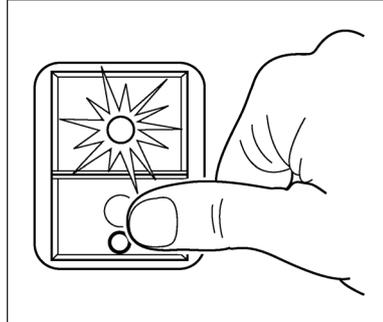

- Unplug the power plug.
- Insert the power plug into the power plug retainer on the unit.

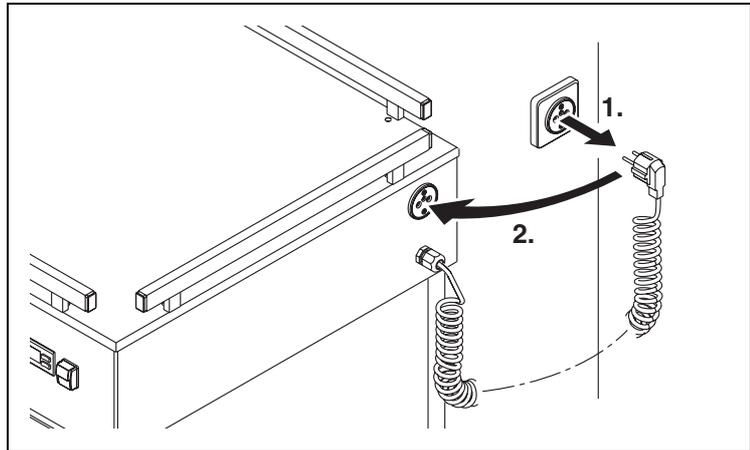

- Position the unit in such a way that children cannot access it, if necessary by placing it with the door side to a wall.  
↪ Chapter "Safety" on page 3.

## Help in the event of problems

### Operation indicator LED on on-/off switch does not illuminate

| Cause  | Action   |
|--|--|
| Power plug is unplugged.   | <ul style="list-style-type: none"> <li>▶ Plug the power plug into the electrical outlet.</li> </ul>  |
| Power plug is damaged; a wire is broken, for example (can also occur without external damage). | <ul style="list-style-type: none"> <li>▶ Have power plug replaced by a facility authorized to carry out repairs.</li> <li>↳ Chapter "Repairs" on page 36.</li> </ul> |
| Customer-accessible fuse (household fuse) is defective.  | <ul style="list-style-type: none"> <li>▶ Check the customer-accessible fuse and replace it if necessary.</li> </ul>  |
| The unit electronic system is defective.   | <ul style="list-style-type: none"> <li>▶ Notify a facility authorized to carry out repairs.</li> <li>↳ Chapter "Repairs" on page 36.</li> </ul>                      |

### Operation indicator LED on on-/off switch illuminates, but unit is not cooling (sufficiently)

| Cause   | Action   |
|---|--|
| The setpoint temperature is set too high.           | <ul style="list-style-type: none"> <li>▶ Set a lower setpoint temperature.</li> <li>↳ Section "Setting the setpoint temperature" on page 14.</li> </ul>  |
| Ventilation slits blocked.                          | <ul style="list-style-type: none"> <li>▶ Remove objects in front of the ventilation of the refrigeration unit.</li> </ul>  |
| High ambient temperature.                           | <ul style="list-style-type: none"> <li>▶ Move the unit to a cooler location.</li> </ul>  |
| Evaporator in unit covered with ice.                | <ul style="list-style-type: none"> <li>▶ Defrost evaporator in unit.</li> <li>↳ Section "Defrosting the unit manually" on page 15.</li> </ul>  |
| Seal on unit door defective.                        | <ul style="list-style-type: none"> <li>▶ Notify a facility authorized to carry out repairs.</li> <li>↳ Chapter "Repairs" on page 36.</li> </ul>  |
| Temperature regulator is in an irregular condition. | <ul style="list-style-type: none"> <li>▶ Switch off cooling briefly.</li> <li>↳ Section "Switching cooling on and off" on page 13.</li> <li>▶ If this does not solve the problem and the causes we have already mentioned can be ruled out, notify an authorized repairs facility.</li> <li>↳ Chapter "Repairs" on page 36.</li> </ul> |

| Cause   | Action  |
|---|---|
| "P1" displayed on the temperature regulator of the refrigeration unit (the thermostat sensor is defective). | <ul style="list-style-type: none"> <li>▶ Notify a facility authorized to carry out repairs.</li> <li>↳ Chapter "Repairs" on page 36.</li> </ul> |
| Refrigeration unit has failed.  | <ul style="list-style-type: none"> <li>▶ Notify a facility authorized to carry out repairs.</li> <li>↳ Chapter "Repairs" on page 36.</li> </ul> |
| The unit electronic system is defective.  | <ul style="list-style-type: none"> <li>▶ Notify a facility authorized to carry out repairs.</li> <li>↳ Chapter "Repairs" on page 36.</li> </ul> |

**"dA" flashes in the display of the temperature regulator**

| Cause  | Action  |
|--|---|
| Door open during cooling.                                      | <ul style="list-style-type: none"> <li>▶ Close the door.</li> </ul>   |
| Door magnet is loose or missing. Door position is not correct. | <ul style="list-style-type: none"> <li>▶ Notify a facility authorized to carry out repairs.</li> <li>↳ Chapter "Repairs" on page 36.</li> </ul> |
| The unit electronic system is defective.                       | <ul style="list-style-type: none"> <li>▶ Notify a facility authorized to carry out repairs.</li> <li>↳ Chapter "Repairs" on page 36.</li> </ul> |

**Alarm indication of temperature regulator (display: "HAL") – temperature overshoot**

| Cause                                 | Action   |
|---------------------------------------|--|
| High ambient temperature.             | <ul style="list-style-type: none"> <li>■ Check temperature deviation and reset saved alarm.                             <ul style="list-style-type: none"> <li>↳ Section "Checking temperature deviations" on page 23.</li> <li>↳ Section "Resetting a saved alarm" on page 24.</li> </ul> </li> <li>■ Move the unit to a cooler location.                             <ul style="list-style-type: none"> <li>– or –</li> <li>Have a refrigeration technician change the refrigeration parameters of the temperature regulator (shorten defrost cycle).</li> </ul> </li> </ul> |
| The evaporator is covered with ice.   | <ul style="list-style-type: none"> <li>■ Check temperature deviation and reset saved alarm.                             <ul style="list-style-type: none"> <li>↳ Section "Checking temperature deviations" on page 23.</li> <li>↳ Section "Resetting a saved alarm" on page 24.</li> </ul> </li> <li>■ Defrost the unit.                             <ul style="list-style-type: none"> <li>↳ Section "Defrosting the unit manually" on page 15.</li> </ul> </li> </ul>  |
| Refrigeration unit failed or damaged. | <ul style="list-style-type: none"> <li>■ Check temperature deviation and reset saved alarm.                             <ul style="list-style-type: none"> <li>↳ Section "Checking temperature deviations" on page 23.</li> <li>↳ Section "Resetting a saved alarm" on page 24.</li> </ul> </li> <li>■ Notify a facility authorized to carry out repairs.                             <ul style="list-style-type: none"> <li>↳ Chapter "Repairs" on page 36.</li> </ul> </li> </ul>  |

**Alarm indication of temperature regulator (display: "LAL") – temperature undershoot**

| Cause  | Action   |
|--|--|
| Refrigeration unit does not switch off when setpoint temperature is reached. | <ul style="list-style-type: none"> <li>■ Check temperature deviation and reset saved alarm.                             <ul style="list-style-type: none"> <li>↳ Section "Checking temperature deviations" on page 23.</li> <li>↳ Section "Resetting a saved alarm" on page 24.</li> </ul> </li> <li>■ Switch cooling off and on again with the On/Off switch.</li> <li>■ If the malfunction remains, notify a facility authorized to carry out repairs.                             <ul style="list-style-type: none"> <li>↳ Chapter "Repairs" on page 36.</li> </ul> </li> </ul> |

**"PoF" appears in the display of the temperature regulator when a button is pressed**

| Cause            | Action   |
|------------------|--|
| Keyboard locked. | <ul style="list-style-type: none"> <li>▶ Unlock the keyboard.</li> <li>↳ Section "Locking and unlocking the keyboard" on page 16.</li> </ul> |

**Corrosion of stainless-steel parts**

| Cause                    | Action   |
|--------------------------|--|
| Incorrect handling/care. | <ul style="list-style-type: none"> <li>▶ Remove the areas of corrosion.</li> <li>↳ Section "Removing areas of corrosion on stainless steel" on page 32.</li> <li>▶ Ensure proper handling/care.</li> </ul> |

**The unit has external damage**

| Cause   | Action   |
|---|--|
| Damage during transport, change of location or other external influences. | <ul style="list-style-type: none"> <li>▶ Shut the unit down.</li> <li>↳ Chapter "Shutting down" on page 25.</li> <li>▶ Secure the unit from being started up accidentally.</li> <li>▶ Notify a facility authorized to carry out repairs.</li> <li>↳ Chapter "Repairs" on page 36.</li> </ul> |

## Cleaning and care

**Stainless steel** Surfaces made of stainless steel must be kept clean, dry and open to the air at all times. When unit is not in operation, keep unit door open to allow air circulation within.

Regularly remove lime, fat, starch and protein coatings by cleaning. Corrosion due to lack of air contact can occur under these coatings.

Do not allow concentrated acids, spices, salts etc. to come into extended periods of contact with parts made of stainless steel. Contact with these substances can cause corrosion. Acid fumes produced during tile cleaning can also lead to corrosion.

Do not damage the surface of stainless steel, especially with other metals. Residues of other metals may form chemical compounds which can cause corrosion.

Avoid contact with iron and steel at all times. Extreme corrosion can result when stainless steel comes into contact with iron (e.g., steel wool, wire scraps, iron-fortified water).

**Cleaning frequency** The unit must be thoroughly cleaned after each use.

**Cleaning methods** The prescribed cleaning method for routine daily cleaning is to wipe the unit over with a damp cloth.

Persistent soiling may be removed with a brush (synthetic or natural bristles). Any other cleaning method must be approved by BLANCO.

☞ Do not use a steam jet device or high-pressure cleaner.

**Cleaning agents** Cleaning agents for light soiling:

- Commercial cleaning agent/water solution
- Soft cleaning cloth
- BLANCO microfiber cleaning cloth (use with water only)


Cleaning agents for heavy soiling:

- Commercially available stainless steel cleaning agent, e.g., BLANCOPOLISH

☞ Synthetic parts (e.g., corner guards ) may not be cleaned with stainless steel cleaning agents, as the surface will be scratched.

**Emptying the condensation-water catch tray daily and cleaning it every two weeks**


- ☞ The condensation-water catch tray is located on the outside on the bottom right side of the unit.
- Pull the condensation-water catch tray from the guide.

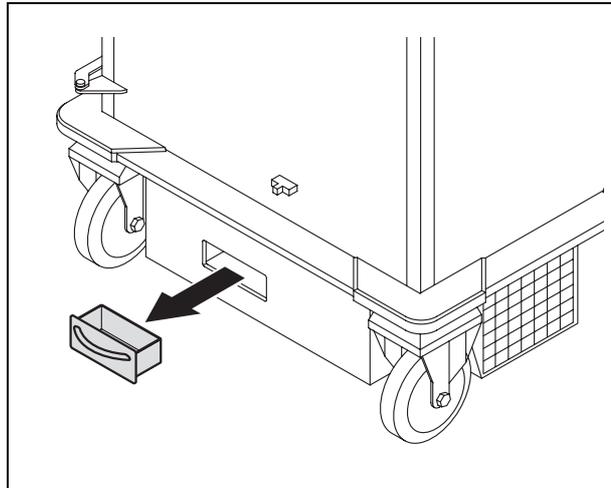

- Empty condensation-water catch tray.
- If necessary, clean the condensation-water catch tray using the cleaning methods described above.
  - ☞ Chapter "Cleaning methods" on page 30.
  - ☞ Chapter "Cleaning agents" on page 30.
- Push the condensation-water catch tray into the guide.

**Cleaning the unit**

- Unplug the power plug.
- Insert the power plug into the power plug retainer on the unit.

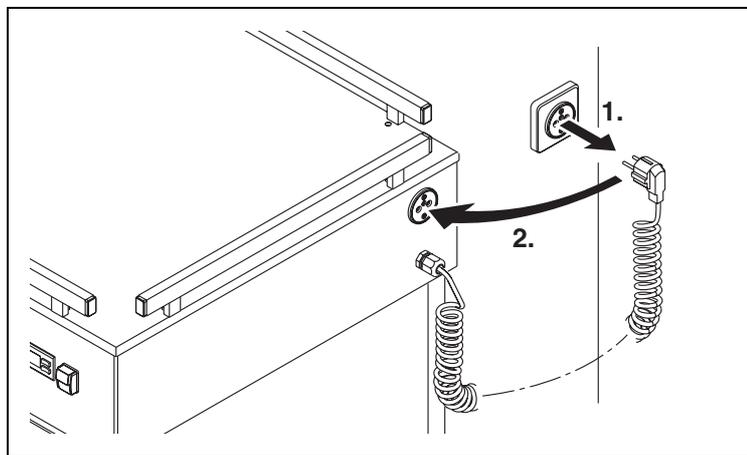

- Clean the unit with the cleaning methods and cleaning agents described above.
- After cleaning with a stainless steel cleaning agent, rinse with water and rub dry.

### Removing areas of corrosion on stainless steel

#### New areas of corrosion

- Unplug power plug from the electrical socket and insert it into the power plug retainer.
- Remove areas of corrosion with a scouring agent or fine sandpaper.

#### Older and more severe areas of corrosion

**i** The cleaning measures described here for older and more severe areas of corrosion are recommendations of the German industry association for home, heating and kitchen technology (Industrieverband Haus-, Heiz- und Küchentechnik e. V. (HKI)).

☞ The cleaning measures for older and more severe areas of corrosion may only be carried out by trained personnel in compliance with the existing regulations.

---

### **Warning!**

#### Caustic substances!

The acids used for removing areas of corrosion can cause injuries and also caustic damage to objects (e.g., clothing). Contact with the eyes can cause irreparable impairment of sight. In the worst case, total loss of sight could result.

- Wear protective clothing (protective eyewear, protective gloves etc.).
- Persons not involved in cleaning must be kept at a distance.

- 
- Ensure that the power plug is unplugged.
  - Remove areas of corrosion with 2–3 % oxalic acid.
  - Use 10% nitric acid if cleaning with oxalic acid is unsuccessful.

---

## Maintenance

### Having the unit regularly maintained


- ☞ BLANCO recommends regular maintenance of the unit by appropriately trained professionals. Regular maintenance prevents failure of the unit, extends its operating life and contributes to general value retention.
- Have maintenance performed on the unit regularly by appropriately trained professionals.

### Maintaining the refrigeration unit

- ☞ BLANCO recommends having the refrigeration unit serviced once a year by a specialist company.

#### Exhaust air suction duct of the refrigeration unit


- Unscrew the four screws on the revision panel of the capacitor on the back of the unit and remove the revision panel.

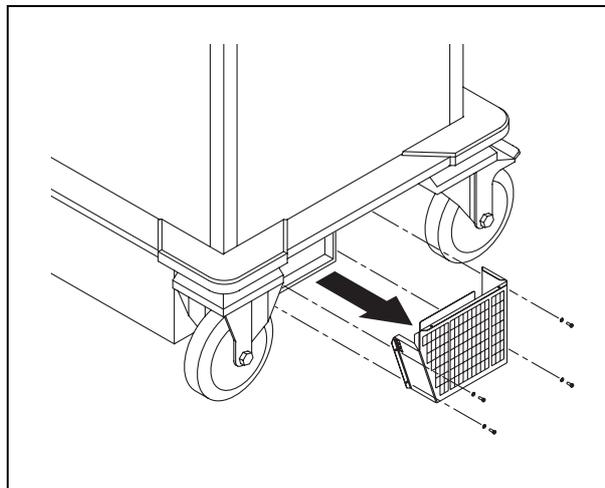

- Exhaust air suction duct.
- Position revision panel in place and secure with the four screws.

### Checking refrigeration unit

- Unscrew the four screws on the revision panel of the refrigeration unit on the front of the unit and remove the revision panel.

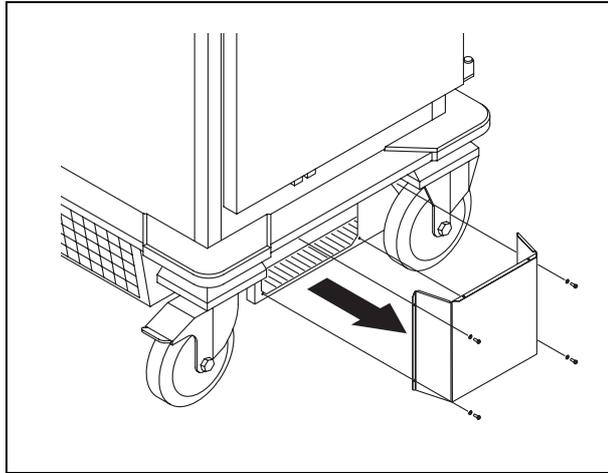

- Check refrigeration unit.
- Position revision panel in place and secure with the four screws.

### Checking the door seal

- ☞ The door seal must be checked regularly for damage.
- Check door seal for damage (visual inspection).
- If damage is present, order replacement of the defective door seal by one of the following:
  - In-house, by BLANCO-trained technician
  - Externally, by BLANCO-trained customer service engineer
  - BLANCO Service

### Checking locking brakes

- ☞ The locking brakes must be checked for effectiveness every time the unit is moved to a new location.
- Lock the locking brakes.
- Try to move the unit while the brakes are locked (do not use excessive force!).
- If the effectiveness of the brakes is not sufficient, have the defective castor replaced immediately by one of the following:
  - In-house, by BLANCO-trained technician
  - Externally, by BLANCO-trained customer service engineer
  - BLANCO Service

### Checking door magnet for proper seating

- ☞ If the door magnet is not properly attached, reliable cooling is not guaranteed.
- Ensure that the door magnet is attached properly.

### Commissioning a periodical electrical safety inspection

- At least once every six months, have a periodical electrical safety inspection carried out by a professional electrician in accordance with the DIN VDE 0702 series of standards.

### Checking the connection cable and power plug

- At least once every six months check the cable and power plug for mechanical damage and signs of excessive aging in accordance with BGV A 3 or the corresponding national regulations.

**Changing the refrigeration parameters**

- i** The refrigeration parameters of the temperature regulator (such as switching hysteresis) can be modified or reset as required by a refrigeration engineer. Information on setting the temperature regulator will be found in the separate operating instructions for the temperature regulator. The storage place for these instructions can be seen in the graphic in the Scope of delivery section.
  - ↳ Operating instructions for temperature regulator.
- If necessary, have the refrigeration parameters changed by a refrigeration engineer.

## Repairs

### Authorized persons

☞ Repairs may only be carried out by the following points:


- In-house, by BLANCO-trained technician
- Externally, by BLANCO-trained customer service engineer
- BLANCO Service
- For repairs to the refrigeration system: Specialist refrigeration engineers

### Description of problem

In order to assess the problem, BLANCO Service requires the following information from the rating plate:

- Article number
- Serial number
- Date of manufacture
- Model

The rating plate is located near the power line to the unit.

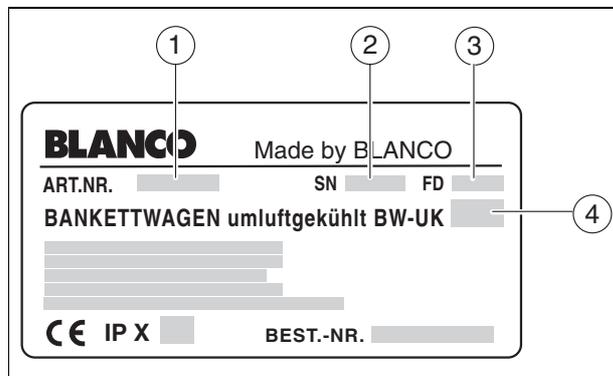

- (1) Article number
- (2) Serial number
- (3) Date of manufacture
- (4) Model

### Replacing components

☞ Defective components (including power cable) may only be replaced through the following service points:

- In-house, by BLANCO-trained technician
- Externally, by BLANCO-trained customer service engineer
- BLANCO Service
- For repairs to the refrigeration system: Specialist refrigeration engineers

### Spare parts

The following information is required when ordering spare parts:

- Designation of spare part
- Article number
- Date of manufacture
- Quantity

☞ Refer to the service CD-ROM and service documentation (available from BLANCO Service).

**Address** BLANCO CS GmbH + Co KG  
Catering Systems  
P.O. Box 13 10  
75033 Oberderdingen  
GERMANY  
Phone +49 7045 44 -81416  
Fax +49 7045 44 -81508  
E-mail cs.service@blanco.de  
Internet www.blanco.de

---

## Disposal

- Disposing of the unit**
- ▶ Have the coolant disposed of by a specialist refrigeration company in accordance with the applicable statutory regulations.
  - ▶ Make the unit unusable before disposing of it.
  - ▶ Turn the unit over to a recycling center or electrical refuse collection site.
-  Detailed information regarding disposal and the addresses of disposal facilities will be available from the respective public office (e.g., city or community administration).

## Technical data

### General data Dimensions and weights (standard variant)

| Model    | Length in mm | Width in mm | Height in mm | Empty weight in kg | Max. load weight in kg |
|----------|--------------|-------------|--------------|--------------------|------------------------|
| BW-UK 10 | 756          | 932         | 1816         | 173                | 300                    |
| BW-UK 15 | 756          | 932         | 1796         | 173                | 300                    |

### Capacity of Gastronorm containers/grates

| Model    | Number of Gastronorm containers |         |        |        | Number of grates GR 2/1 |
|----------|---------------------------------|---------|--------|--------|-------------------------|
|          | 2/1-100                         | 1/1-100 | 2/1-65 | 1/1-65 |                         |
| BW-UK 10 | 10                              | 20      | 10     | 20     | 9                       |
| BW-UK 15 | 7                               | 14      | 15     | 30     | 14                      |

### Temperature, compartment interior

-10 °C to +8 °C, adjustable

### Distance between support ledges

115 mm (BW-UK 10)

75 mm (BW-UK 15)

### Distance from the protruding knobs (tip-prevention devices) to the support ledges

7 mm

### Load-bearing capacity

| Component | Permitted area load in kg |
|-----------|---------------------------|
| Unit top  | 25                        |

### Electrical data Connected load

For all models:

**Voltage:** 220 to 240 V, 50 Hz

**Power (max.):** 0.8 kW

### Protection type

IP X4 (the unit is protected against splashed water in accordance with DIN EN 60529.)

**Environment Environmental conditions – operation**

Temperature range: +15 °C to +32 °C  
 Relative humidity: Without condensation

**Environmental conditions – storage, transportation**

Temperature range: -10 °C to +40 °C  
 Relative humidity: Without condensation

**Material**

Unit body: Stainless steel, polystyrene, polyamide  
 Insulation of unit door: Polystyrene

**Refrigeration system**

Coolant: R 404A (CFC-free)  
 Cooling range: -10 to +8 °C  
 Defrosting: Automatic, and manual where necessary  
 Sealing: Refrigeration system checked for proper sealing at factory  
 Cooling output: 1.407 kW at  
 $t_0 = -10\text{ °C}$  (evaporation temperature)  
 $t_a = +32\text{ °C}$  (ambient temperature)

## Ordering information

|                               |                  |                  |
|-------------------------------|------------------|------------------|
| <b>BW-UK 10</b>               | Article number:  | 572 876, 367 435 |
| <b>BW-UK 15</b>               | Article number:  | 572 877, 367 435 |
| <b>Operating instructions</b> | Document number: | 154 351          |

---

## Accessories

|   |                  |                     |
|---|------------------|---------------------|
| <b>Gastronorm grates, GR 2/1</b>                            | Article numbers: | ↳ BLANCO price list |
| <b>Gastronorm containers</b>                                | Article numbers: | ↳ BLANCO price list |
| <b>Cloches</b>  | Article numbers: | ↳ BLANCO price list |
| <b>Plate carriers</b>                                       | Article numbers: | ↳ BLANCO price list |
| <b>BLANCO microfiber cleaning cloth</b>                     | Article number:  | 126 999             |
| <b>Stainless steel cleaning and care agent BLANCOPOLISH</b> | Article number:  | 511 895             |
| <b>Service CD</b>   | Article number:  | ↳ BLANCO price list |

---

## Standards, guidelines, inspection seal

DIN 18865-9: Large kitchen devices, production systems, cabinet interiors in standard and hygienic models.

DIN 18867-5: Equipment for commercial kitchens – Mobile equipment – Cooled banquet trolleys.

DIN EN 60335-1: Safety of household and similar electrical appliances; Part 1: General requirements.

DIN EN 60335-2-24: Safety of household and similar electrical appliances; Part 2-24: Special requirements for refrigeration/freezing units, ice cream and ice makers.

DIN EN 60335-2-89: Safety of household and similar electrical appliances; Part 2-89: Special requirements for commercial cooling/freezing units with built-in or separate condensing unit or motor compressor.

DIN EN 60529: Protection types provided by enclosures (IP code).

BGR 111 (ZH1/37): Rules on safety and health protection for working in kitchens.

BGV A 3 (VBG 4): Accident prevention regulations for electrical units and devices.

DIN EN ISO 9001: BLANCO is certified in accordance with DIN EN ISO 9001.



HKI quality mark: Collective mark of the German industry association for home, heating and kitchen technology (Industrieverband Haus-, Heiz- und Küchentechnik e. V.) This mark documents the particularly high standard of the unit with regard to quality, service and ecology.



.....

.....

.....

.....

.....

.....



BLANCO CS GmbH + Co KG  
Catering Systems  
P.O. Box 13 10  
75033 Oberderdingen  
GERMANY  
Phone + 49 7045 44 - 81416  
Fax + 49 7045 44 - 81508  
E-mail [cs.service@blanco.de](mailto:cs.service@blanco.de)  
Internet [www.blanco.de](http://www.blanco.de)

**BLANCO**